

ROUTE 242/ CONCORD AVENUE INTERCHANGE

**PROPONENT:
CONTRA COSTA
TRANSPORTATION
AUTHORITY/
CONCORD**


**PROJECT NO:
1108**

DESCRIPTION:

Improvements at the State Route 242/Concord Avenue interchange included a new northbound loop on-ramp, a new southbound loop on-ramp, realignment of the existing southbound off-ramp, and construction of northbound and southbound auxiliary lanes between the Concord Avenue and Grant Street/Solano Way interchanges. These improvements included three new structures and the widening of two others, the widening of Concord Avenue and State Route 242, paving, restriping and new signals at the four off-ramp intersections. Approximately 8,600 feet of soundwall were constructed along both sides of State Route 242 to mitigate existing noise impacts.

STATUS:

Construction completed in 1997.

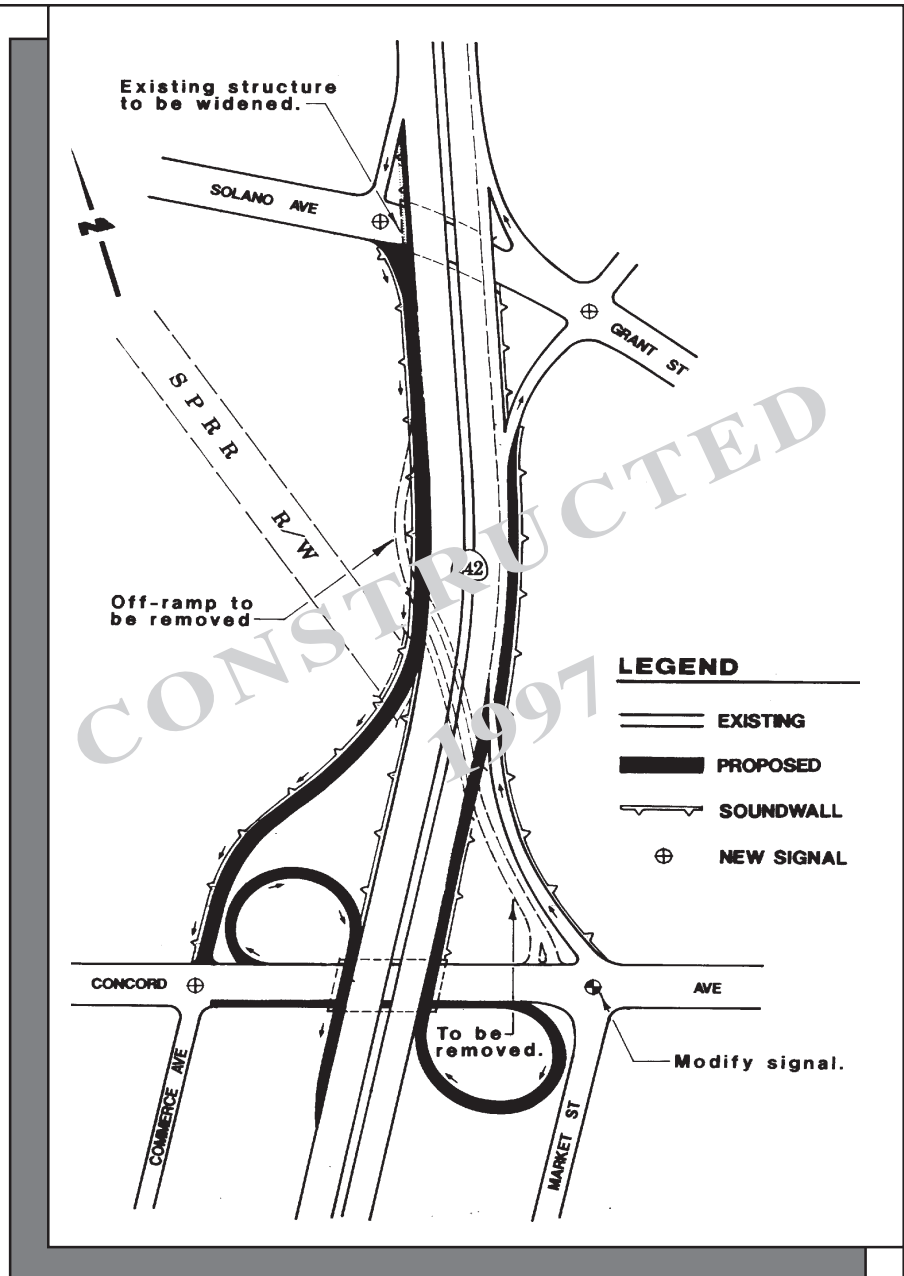

FUNDING SOURCES	(\$ X 1000):
Federal	6,000.0
State	1,608.0
Local	9,800.0
Measure C (Esc.\$) ¹	<u>14,884.0</u>
TOTAL	\$32,292.0

¹ Measure C funds shown in escalated dollars. Actual commitment is in 1988 dollars as shown in Appendix A.